

# BGDSHR RETRACTABLE DOCK SHELTER

## FEATURES AND SPECIFICATIONS

Designed to accommodate 10.5' x 10.5' (3.2m x 3.2m) door openings, the BGDSHR provides full access to the rear of the trailer. The collapsible frame retracts on impact, reducing pressure against the curtains and building wall and preserving both equipment and building integrity. Stiffeners in the head and side curtains help to maintain constant pressure against the trailer during loading and unloading, ensuring a tight seal that keeps external temperatures and airborne contaminants at bay.

Standard units seal trailers 12' to 13.5' (3.7m to 4.1m) high on a typical 4' (1.2m) dock height.


### STANDARD FEATURES:

- 24" (610mm) projection
- 22 oz. Hi-Tear vinyl base fabric
- Resilient head unit measuring 138" (3.5m) wide, with a 24" (610mm) projection and a 36" (914mm) drop curtain
- Protective wear flaps on head curtain
- High visibility 24" (610mm) yellow guide stripe
- Galvanized tubular framing
- Replaceable foam bottom pads seal gap between truck and building
- Peaked header frame to divert water from dock floor
- Galvanized mounting hardware

For maximum value and performance, the BGDSHR can be constructed from our premium durability fabrics (see chart for materials, weights, and available colors).

### ADDITIONAL OPTIONS INCLUDE:

- Double layer of protective fabric on bottom 24" (610mm) of side curtains
- Extra width
- Extra height
- Additional drop in head curtain
- Additional width on side curtains

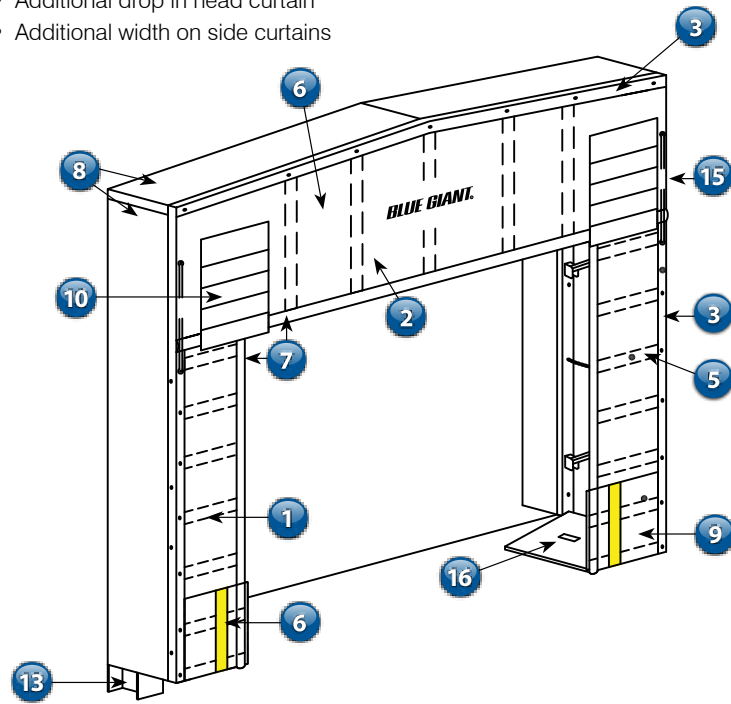

BGDSHR Retractable Dock Shelter

### FABRIC AND COLOR SELECTION:

22oz Hi-Tear Vinyl	■	■	■	■
32oz Hi-Tear Vinyl	■			
40oz Hi-Tear Vinyl	■	■	■	■
50oz Hi-Tear Vinyl	■			
16oz Hi-Performance Hypalon	■			
40oz Hi-Performance Hypalon	■			

No.	DESCRIPTION
1	Side curtain
2	Header curtain †
3	Galvanized trim angle
4	Galvanized steel "U" pivot bracket †
5	Stays
6	4" x 24" (102mm x 610mm) yellow guide stripe
7	Foam filled edge stiffener
8	Perimeter cover fabric
9	Double layer of fabric 24" (610mm) high*
10	Protective flaps
11	2" x 2" x 3/16" (51mm x 51mm x 5mm) HSS galvanized tubing †
12	Galvanized extension arm (HSS tubing) †
13	10' (3m) I-Beam (10' (3m) LG.)
14	1/4" (6mm) Diam. galvanized chain †
15	Wind straps
16	Bottom draft pad

\*Some items displayed may be optional

† Not shown on drawing

**BLUE GIANT**  
BLUE GIANT EQUIPMENT CORPORATION

**Corporate** 85 Heart Lake Road South  
Brampton, ON, Canada L6W 3K2  
t 905.457.3900 f 905.457.2313

**USA** 6350 Burnt Poplar Road  
Greensboro, NC 27409  
[www.BlueGiant.com](http://www.BlueGiant.com)

Blue Giant offers a full line of dock levelers, dock safety equipment, seals and shelters, accessories, ergonomic and scissor lift equipment and industrial trucks. Concurrent with our continuing product improvement program, specifications are subject to change without notice. Please contact Blue Giant for latest information. Some features illustrated may be optional in certain market areas.